

**TELETRUK** | STAGE V DIESEL RANGE

**JCB**



**STAGE V**

MAX CAPACITY  
**3000 - 3500kg**

CAPACITY AT 2m  
**1900 - 2600kg**

MAX LIFT HEIGHT  
**4.4 - 5.15m**


# REACH FOR GREATER PRODUCTIVITY.

The Teletruk is designed to make the most of your time and space, with its unique telescopic boom, small turning circle and single side loading.



## SPACE SAVING

Save 70m<sup>2</sup> of space per truck with single side loading. Unique forward reach allows you to load and unload trucks from one side in indoor and outdoor environments, saving valuable space, time and money.

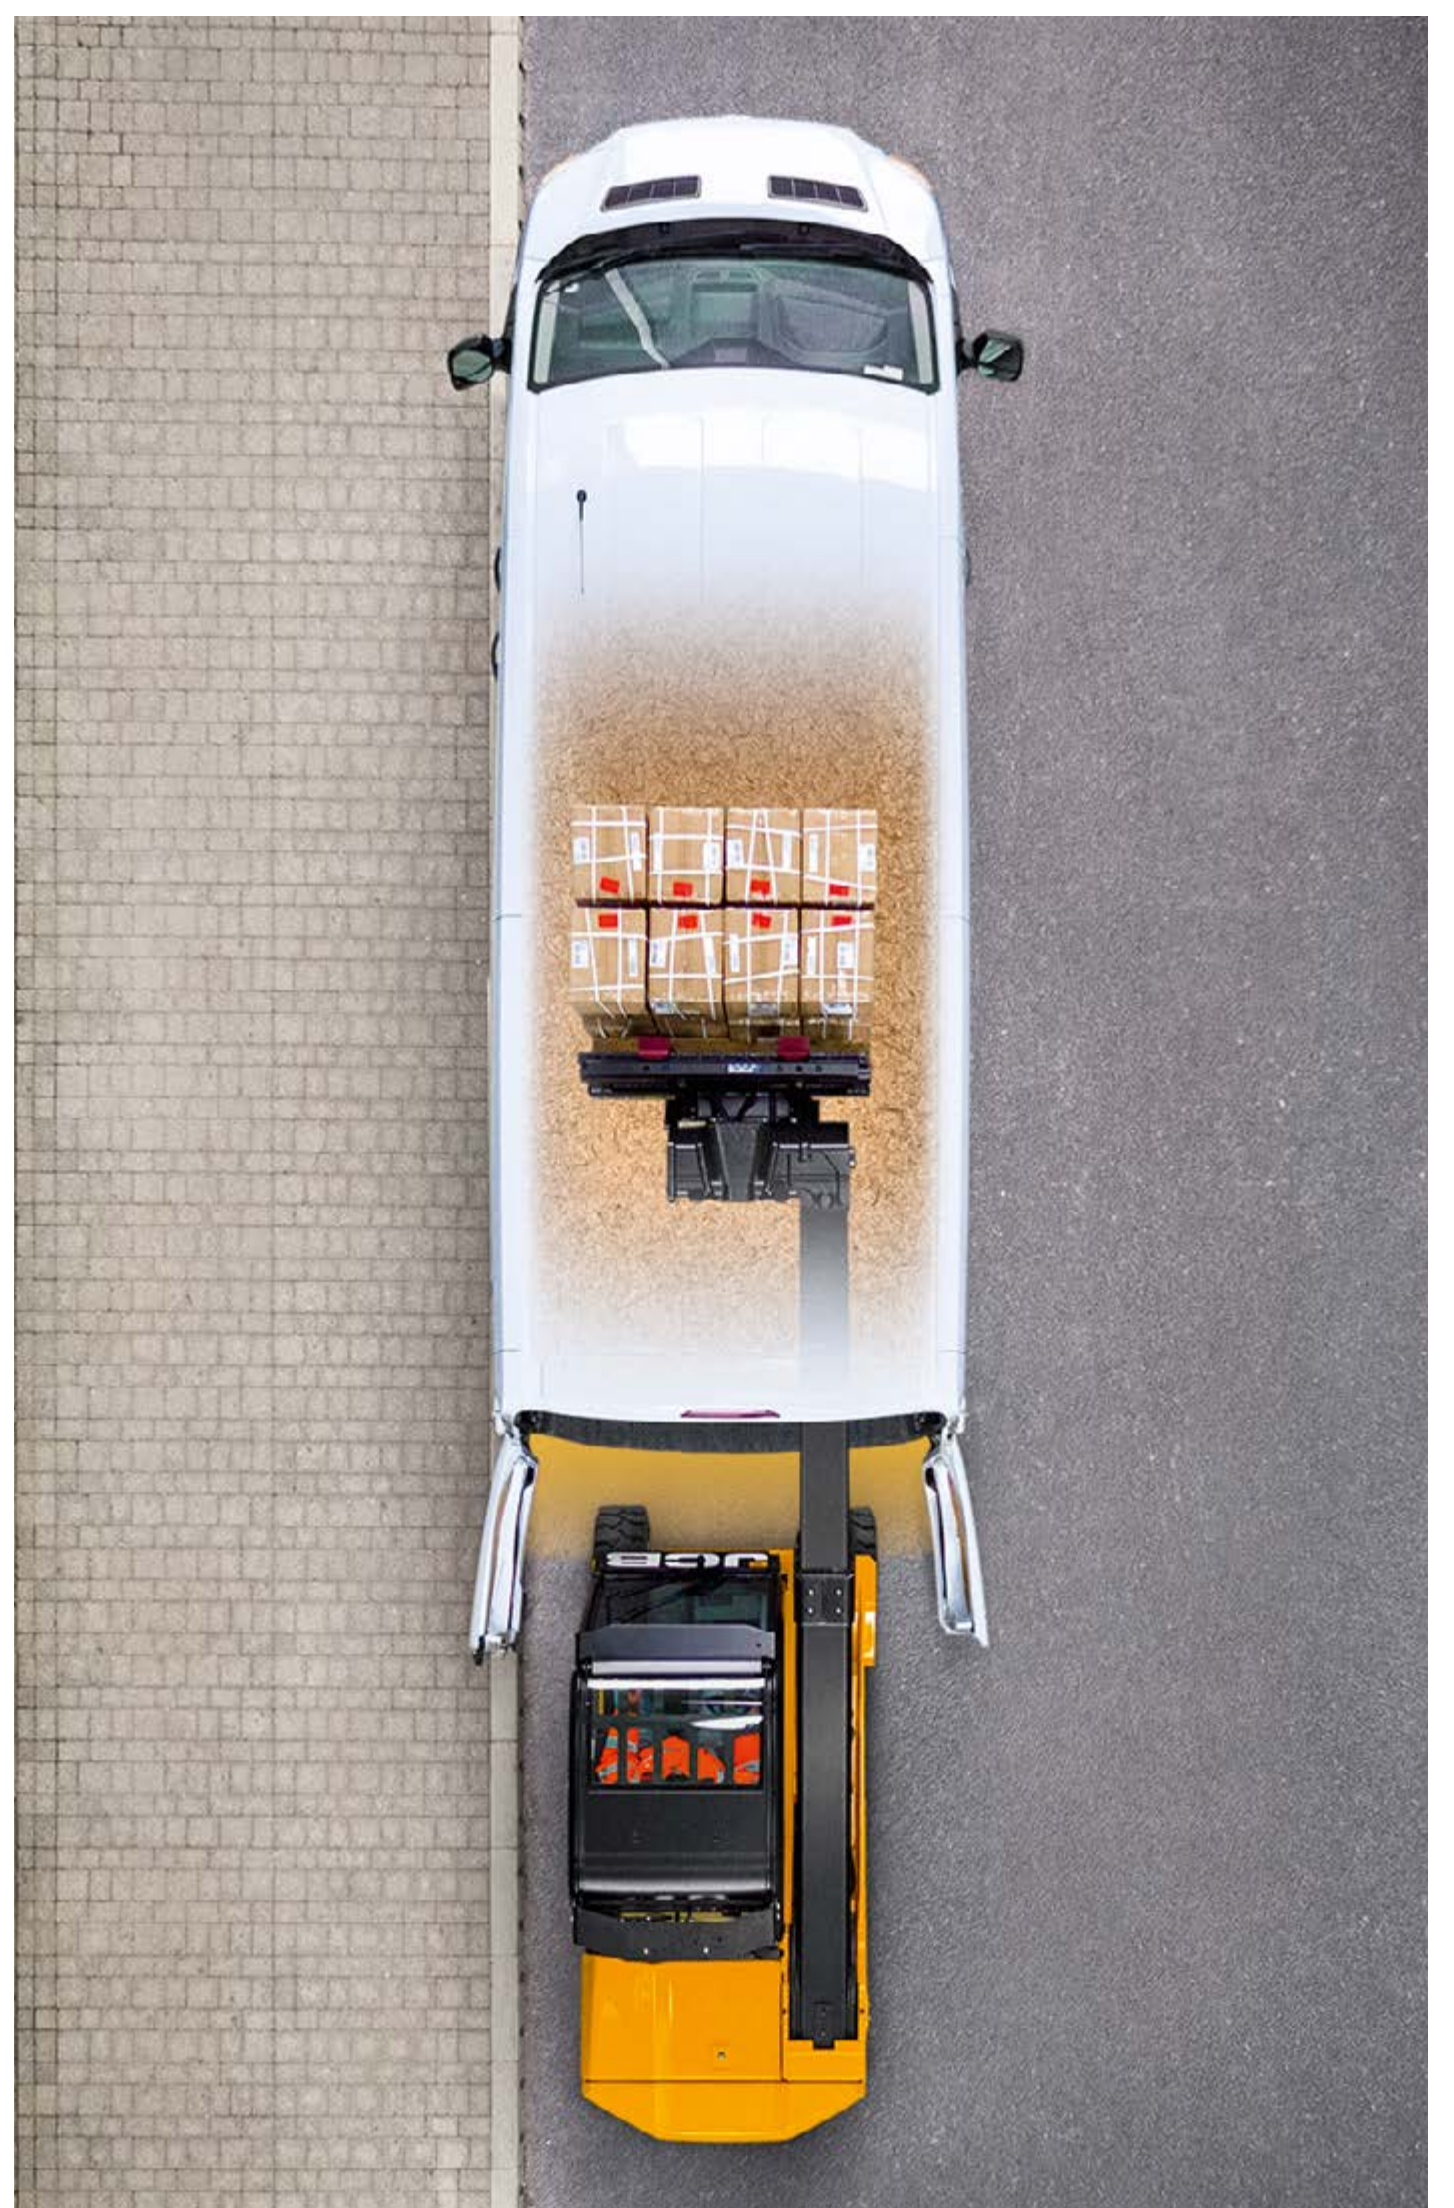

# REACH FOR GREATER SAFETY.

With superb visibility, precision control and unique design features, the Teletruk reaches new heights of safety, making all operators feel in total control.



## LOADS SAFER

JCB's load motion control system helps prevent forward tip, for increased on-site safety.

# REACH FOR GREATER VERSATILITY.

Four wheel drive delivers four tonnes of tractive effort, to support bucket work, travelling over rough ground and up to 21% gradients.



## UNIQUE BENEFITS

One hundred and eleven degrees of carriage rotation makes handling goods easier and safer.



# REACH FOR GREATER EFFICIENCY.

The JCB Teletruk's unique boom enables the operator to reach into the second or third row of materials improving efficiency and safety.



## COMPLETE VISIBILITY

The Teletruk's unique side-mounted boom design provides unrivalled 360° visibility for the operator.

# REACH FOR GREATER COMFORT.

The JCB CommandPlus cab ensures superior operator comfort, enabling you to gain maximum productivity from this uniquely versatile machine.



## COMPLETE CONTROL

A fully proportional single lever joystick, gives operators full control when lifting and lowering materials.



# TELETRUK | STAGE V DIESEL RANGE



## SPECIFICATION.

MODEL	30-19D	30-20D HL	35-23D	30-23D (4x4)	35-26D (4x4)
Lift height	4400mm	5150mm	4400mm	4400mm	4400mm
Lift capacities	3000kg	3000kg	3500kg	3000kg	3500kg
Capacity at 2m reach	1900kg	2000kg	2300kg	2300kg	2600kg
Overall height including roofguard (std/low)	2220/ 2140mm	2220/ 2140mm	2220/ 2140mm	2320/ 2240mm	2320/ 2240mm
Aux hydraulics flow	28-70 lpm	28-70 lpm	28-70 lpm	28-70 lpm	28-70 lpm
Travel speed	20kph	20kph	20kph	20kph	20kph
Turning radius	2885mm	2885mm	2885mm	3600mm	3600mm



## STANDARD FEATURES.

- Powerful hydraulic motors
- All round LED work lights
- Single lever joystick control
- ROPS/FOPS certified cab
- Beacon and reverse alarm
- JCB LiveLink telematics
- Fully tilting cab
- 2 years/3000 hours warranty
- Upswept exhaust
- Load motion control



# STAGE V DIESEL TELETRUK

**THE JCB TELETRUK PROVIDES UNRIVALLED  
FORWARD VISIBILITY, FORWARD REACH  
AND LARGE LIFT CAPACITY.**

**REQUEST A QUOTE**



[www.jcb.com](http://www.jcb.com)

